




# SPUR GEARS

Plastic gears provide quiet operation without lubrication. Listed are a small sampling of our standard sizes. However, other sizes and materials are available upon request.

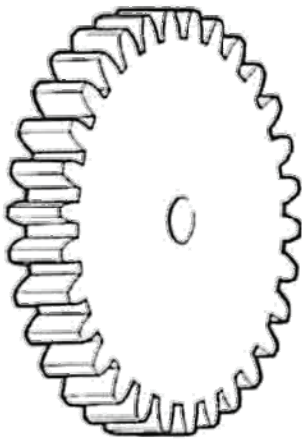

Styles Available	
A	A Plate
B	B Style, hub on one side
C	C Style, hub on both sides

**800-295-7660**

Teeth	Pressure Angle	Pitch Dia.	Stock Bore	Extension
15	20°/14-1/2°	5.000"	3/4"	A,B,C,D,X
18	20°/14-1/2°	6.000"	3/4"	A,B,C,D,X
20	20°/14-1/2°	6.667"	3/4"	A,B,C,D,X
24	20°/14-1/2°	8.000"	3/4"	A,B,C,D,X
30	20°/14-1/2°	10.000"	3/4"	A,B,C,D,X
36	20°/14-1/2°	12.000"	3/4"	A,B,C,D,X
42	20°/14-1/2°	14.000"	3/4"	A,B,C,D,X
48	20°/14-1/2°	16.000"	3/4"	A,B,C,D,X
54	20°/14-1/2°	18.000"	3/4"	A,B,C,D,X
60	20°/14-1/2°	20.000"	3/4"	A,B,C,D,X
15	20°/14-1/2°	3.750"	3/4"	A,B,C,D,X
18	20°/14-1/2°	4.500"	3/4"	A,B,C,D,X
20	20°/14-1/2°	5.000"	3/4"	A,B,C,D,X
24	20°/14-1/2°	6.000"	3/4"	A,B,C,D,X
30	20°/14-1/2°	7.500"	3/4"	A,B,C,D,X
36	20°/14-1/2°	9.000"	3/4"	A,B,C,D,X
42	20°/14-1/2°	10.500"	3/4"	A,B,C,D,X
48	20°/14-1/2°	12.000"	3/4"	A,B,C,D,X
54	20°/14-1/2°	13.500"	3/4"	A,B,C,D,X
60	20°/14-1/2°	15.000"	3/4"	A,B,C,D,X
15	20°/14-1/2°	3.000"	3/4"	A,B,C,D,X
18	20°/14-1/2°	3.600"	3/4"	A,B,C,D,X
20	20°/14-1/2°	4.000"	3/4"	A,B,C,D,X
24	20°/14-1/2°	4.800"	3/4"	A,B,C,D,X
28	20°/14-1/2°	5.600"	3/4"	A,B,C,D,X
40	20°/14-1/2°	8.000"	3/4"	A,B,C,D,X
50	20°/14-1/2°	10.000"	3/4"	A,B,C,D,X
60	20°/14-1/2°	12.000"	3/4"	A,B,C,D,X
80	20°/14-1/2°	16.000"	3/4"	A,B,C,D,X
12	20°/14-1/2°	2.000"	3/4"	A,B,C,D,X
18	20°/14-1/2°	3.000"	3/4"	A,B,C,D,X
24	20°/14-1/2°	4.000"	3/4"	A,B,C,D,X
36	20°/14-1/2°	6.000"	3/4"	A,B,C,D,X
48	20°/14-1/2°	8.000"	3/4"	A,B,C,D,X
60	20°/14-1/2°	10.000"	3/4"	A,B,C,D,X
72	20°/14-1/2°	12.000"	3/4"	A,B,C,D,X
12	20°/14-1/2°	1.500"	3/4"	A,B,C,D,X
18	20°/14-1/2°	2.250"	3/4"	A,B,C,D,X
24	20°/14-1/2°	3.000"	3/4"	A,B,C,D,X
30	20°/14-1/2°	3.750"	3/4"	A,B,C,D,X
36	20°/14-1/2°	4.500"	3/4"	A,B,C,D,X
48	20°/14-1/2°	6.000"	3/4"	A,B,C,D,X
15	20°/14-1/2°	1.500"	3/4"	A,B,C,D,X
18	20°/14-1/2°	2.000"	3/4"	A,B,C,D,X
28	20°/14-1/2°	2.400"	3/4"	A,B,C,D,X
32	20°/14-1/2°	3.200"	3/4"	A,B,C,D,X
48	20°/14-1/2°	4.800"	3/4"	A,B,C,D,X
54	20°/14-1/2°	5.400"	3/4"	A,B,C,D,X
60	20°/14-1/2°	6.000"	3/4"	A,B,C,D,X
15	20°/14-1/2°	1.250"	3/4"	A,B,C,D,X
20	20°/14-1/2°	1.667"	3/4"	A,B,C,D,X
24	20°/14-1/2°	2.000"	3/4"	A,B,C,D,X
28	20°/14-1/2°	2.333"	3/4"	A,B,C,D,X
34	20°/14-1/2°	2.833"	3/4"	A,B,C,D,X
48	20°/14-1/2°	4.000"	3/4"	A,B,C,D,X
60	20°/14-1/2°	5.000"	3/4"	A,B,C,D,X